

FIGURE 19

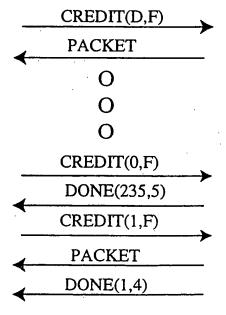
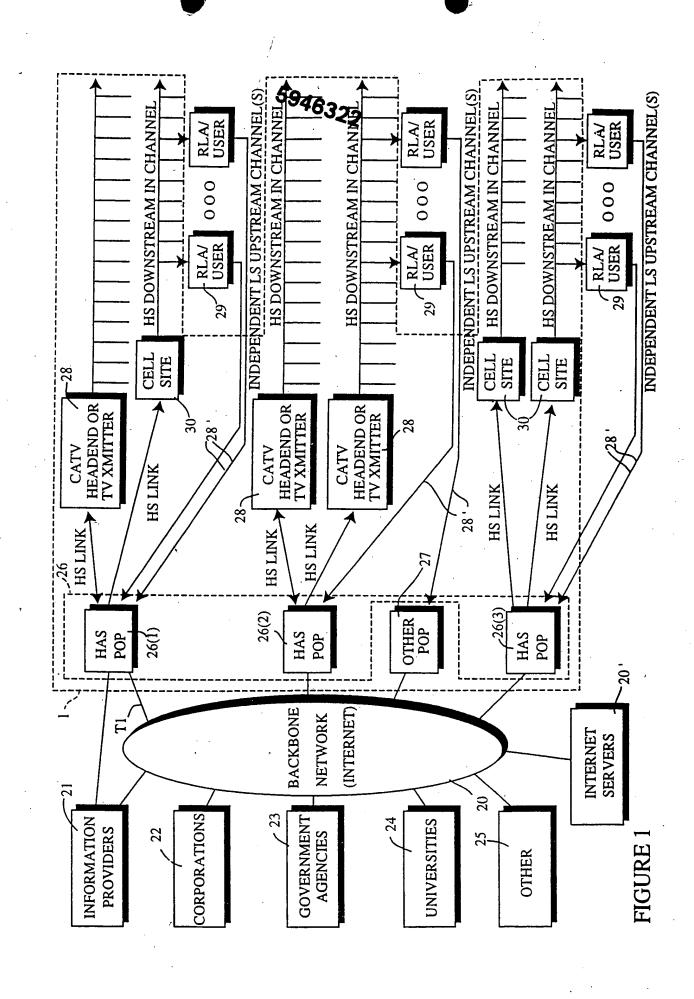
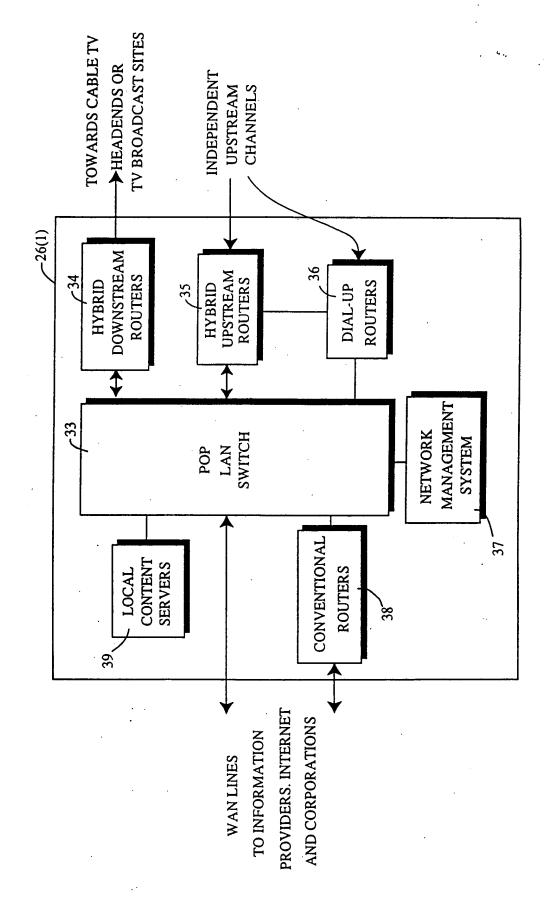
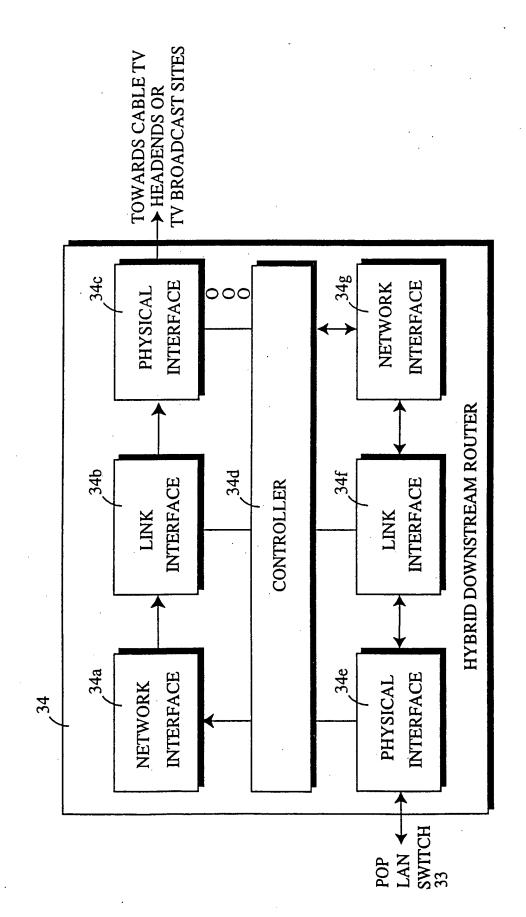
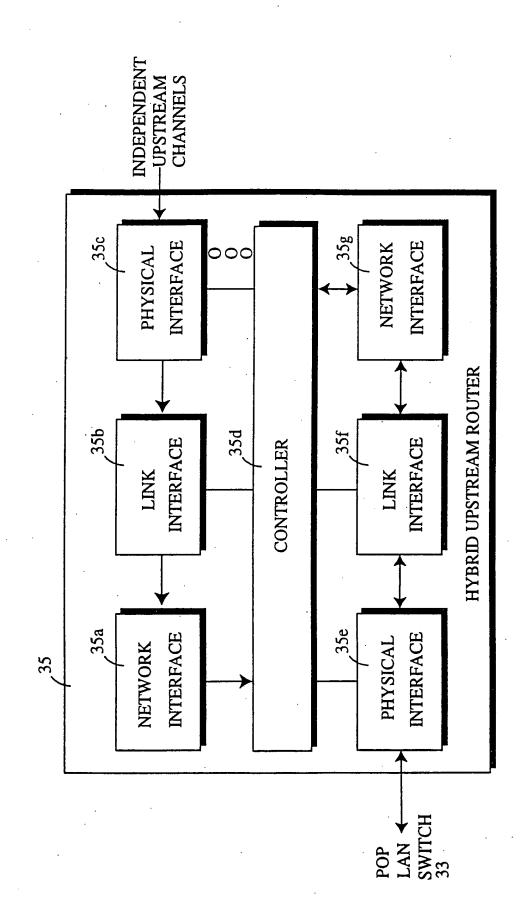



FIGURE 20









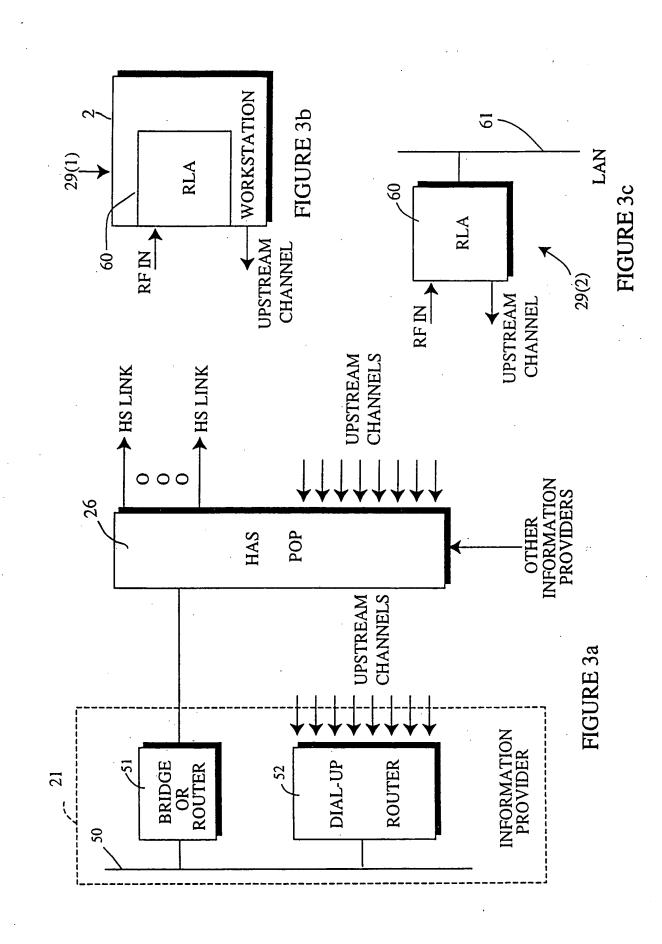

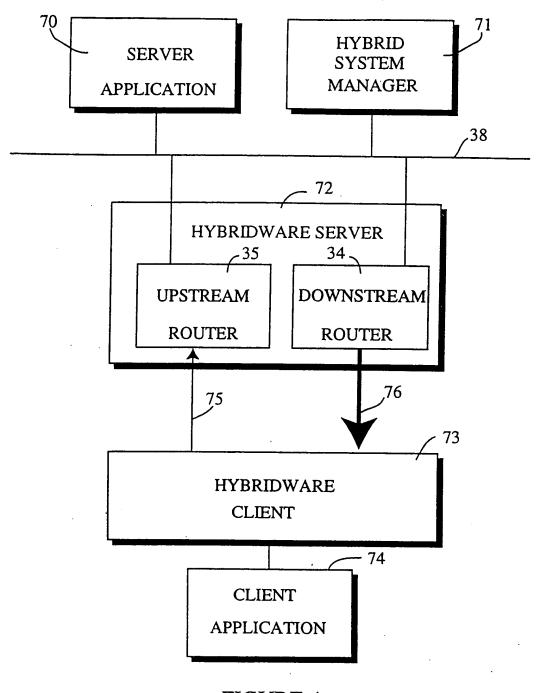
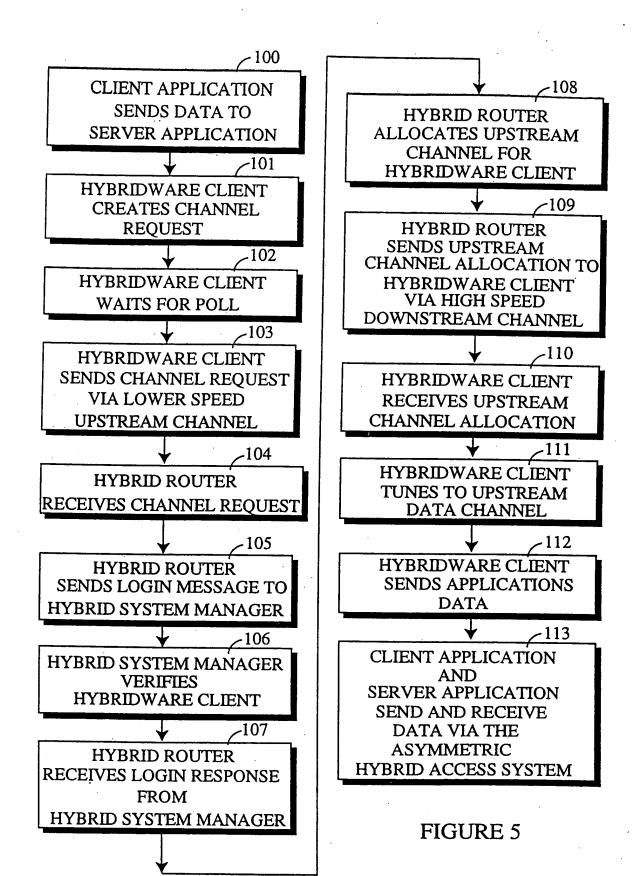
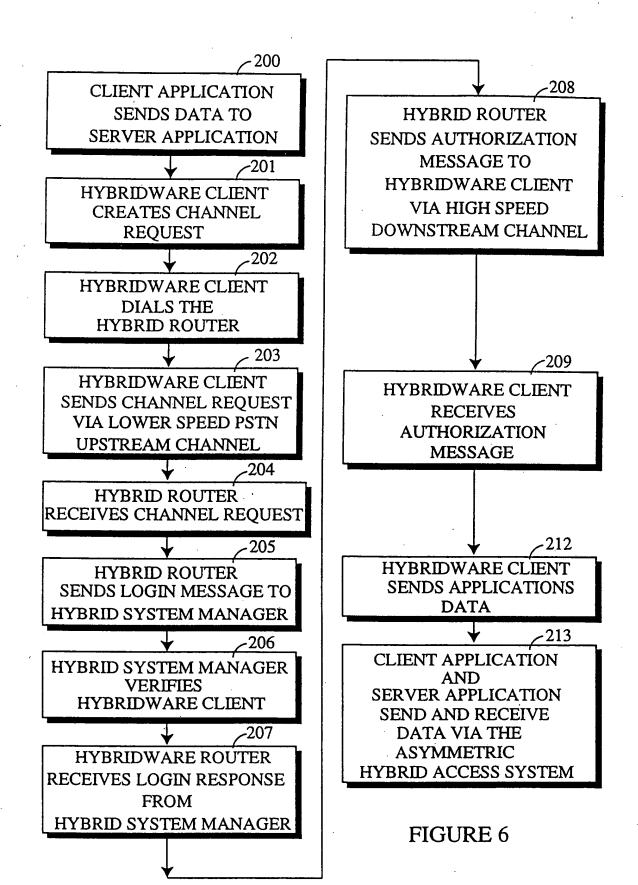
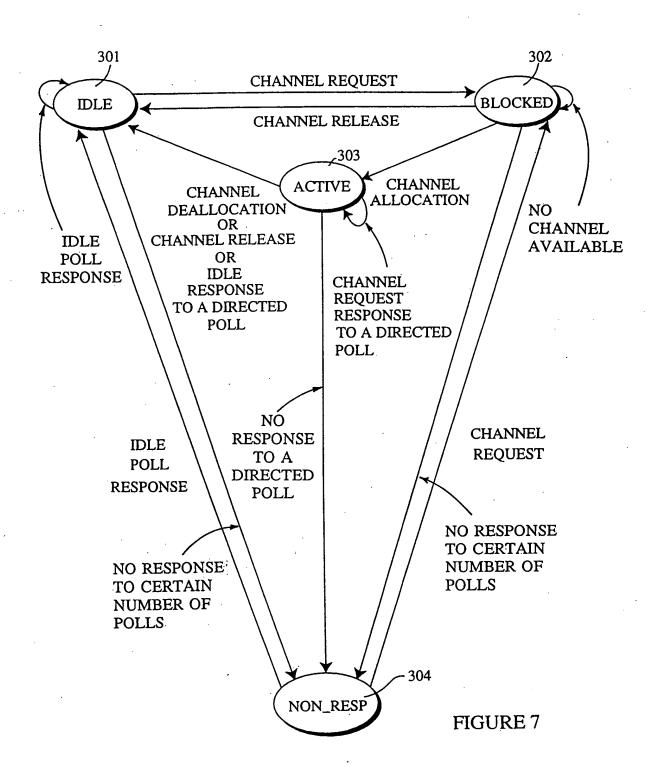


FIGURE 4







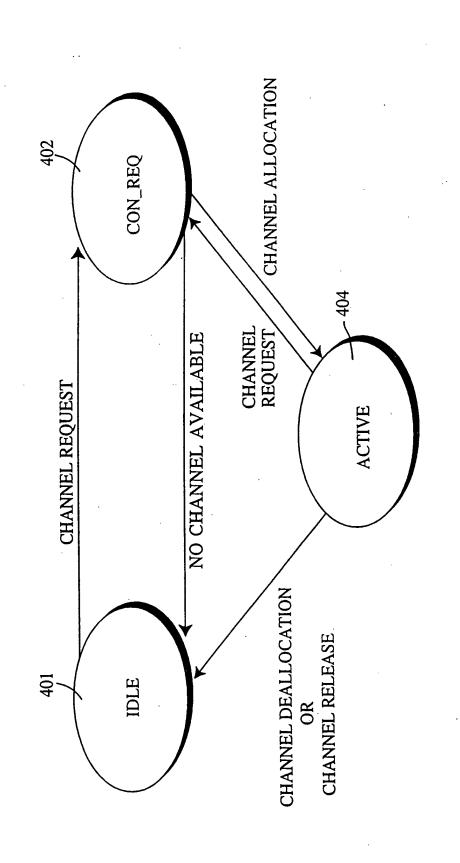


FIGURE 8

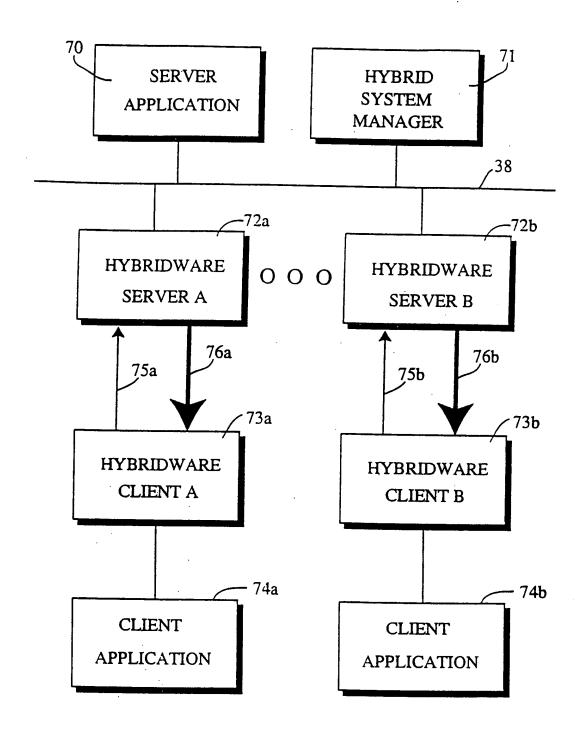
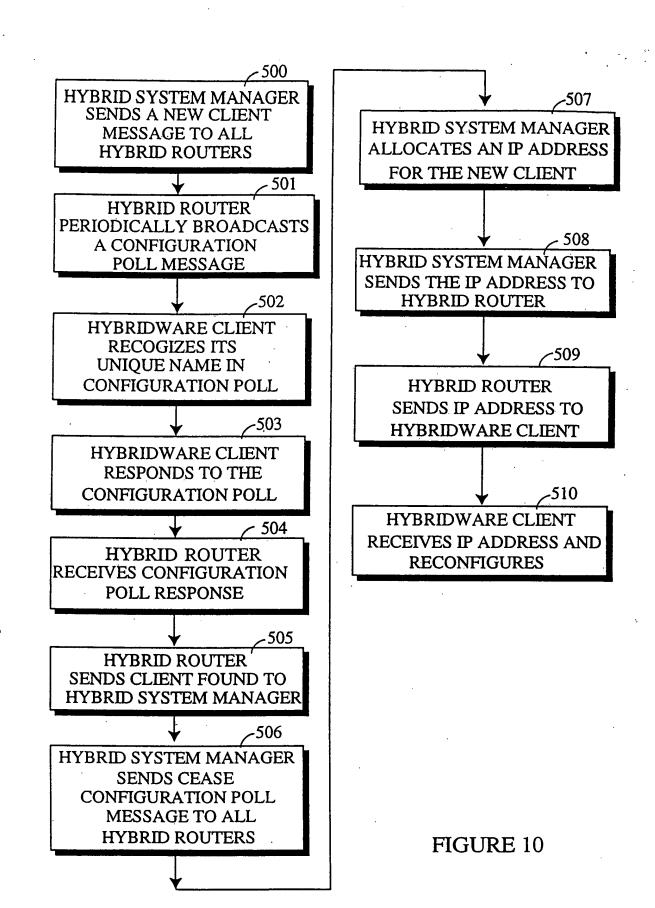


FIGURE 9




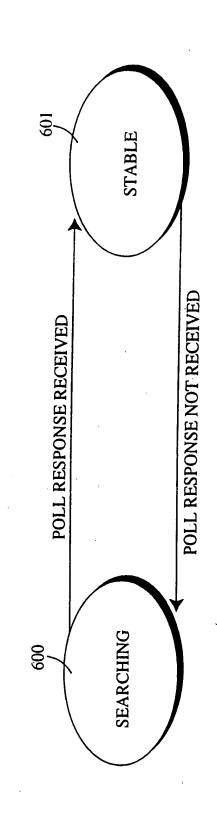



FIGURE 11

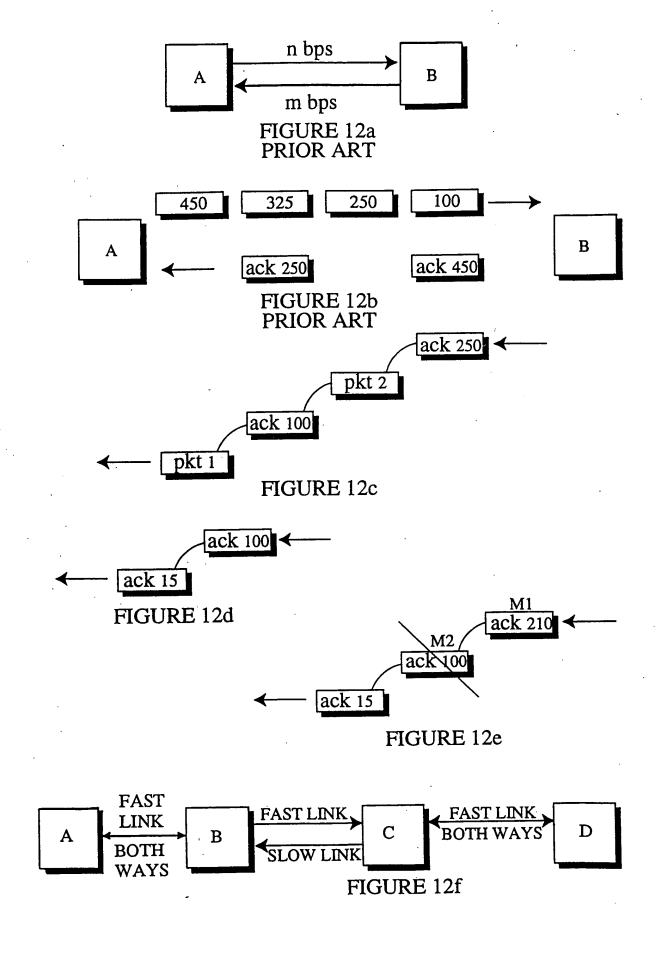


	<u>.</u>			IP HEADER	→				TCP HEADER			→
→ 32 BITS — →	TOTAL LENGTH	D M FRAGMENT OFFSET	DIAGRAM HEADER CHECKSUM	SOURCE ADDRESS	DESTINATION ADDRESS	OPTIONS (0 OR MORE 32 BITS)	DESTINATION PORT	SEQUENCE NUMBER	ACKNOWLEDGEMENT NUMBER	WINDOW	URGENT POINTER	OPTIONS (0 OR MORE 32 BITS)
	TYPE OF SERVICE	DATAGRAM NUMBER	PROTOCOL				SOURCE PORT			uaersf rcosyi gkntnn		
	VERSION IP HDR LEN		TIME TO LIVE							TCP HDR LEN	CHECKSUM	

FIGURE 13

CURRENT TRANSMIT AHEAD WINDOW OPENING FOR A

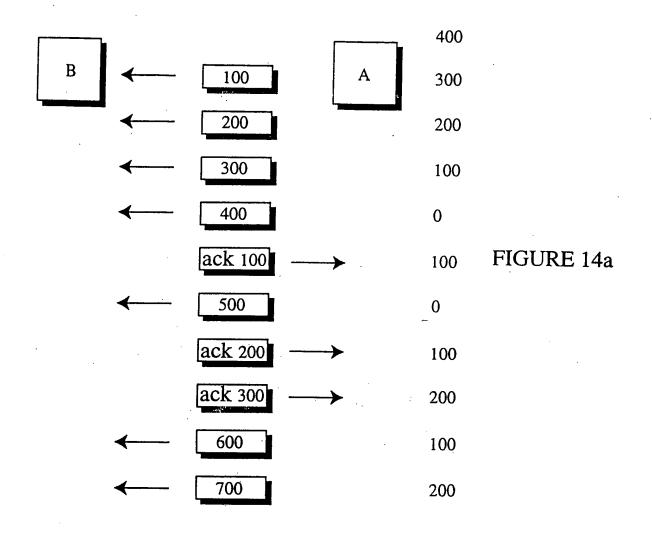

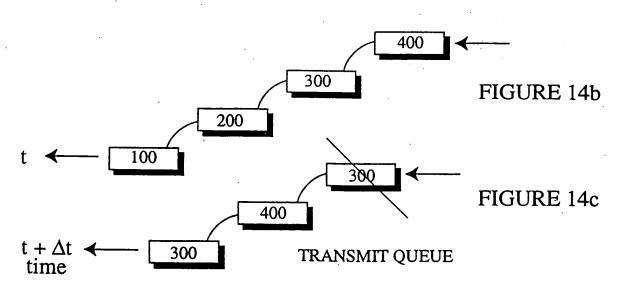

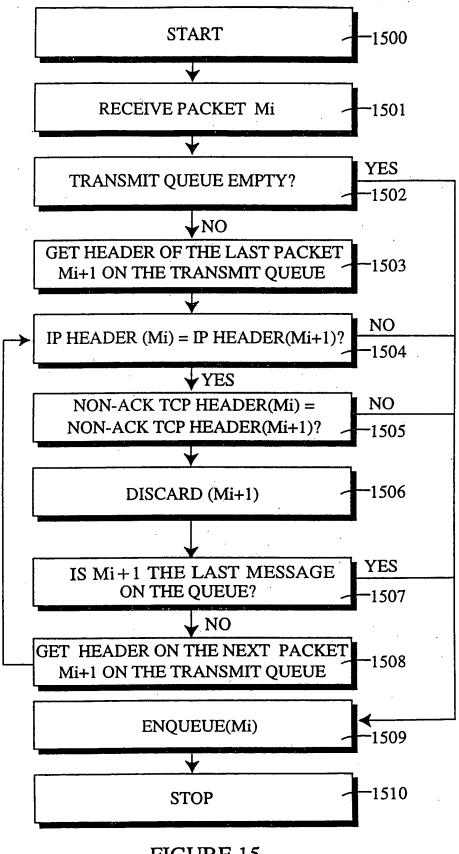


FIGURE 15

